

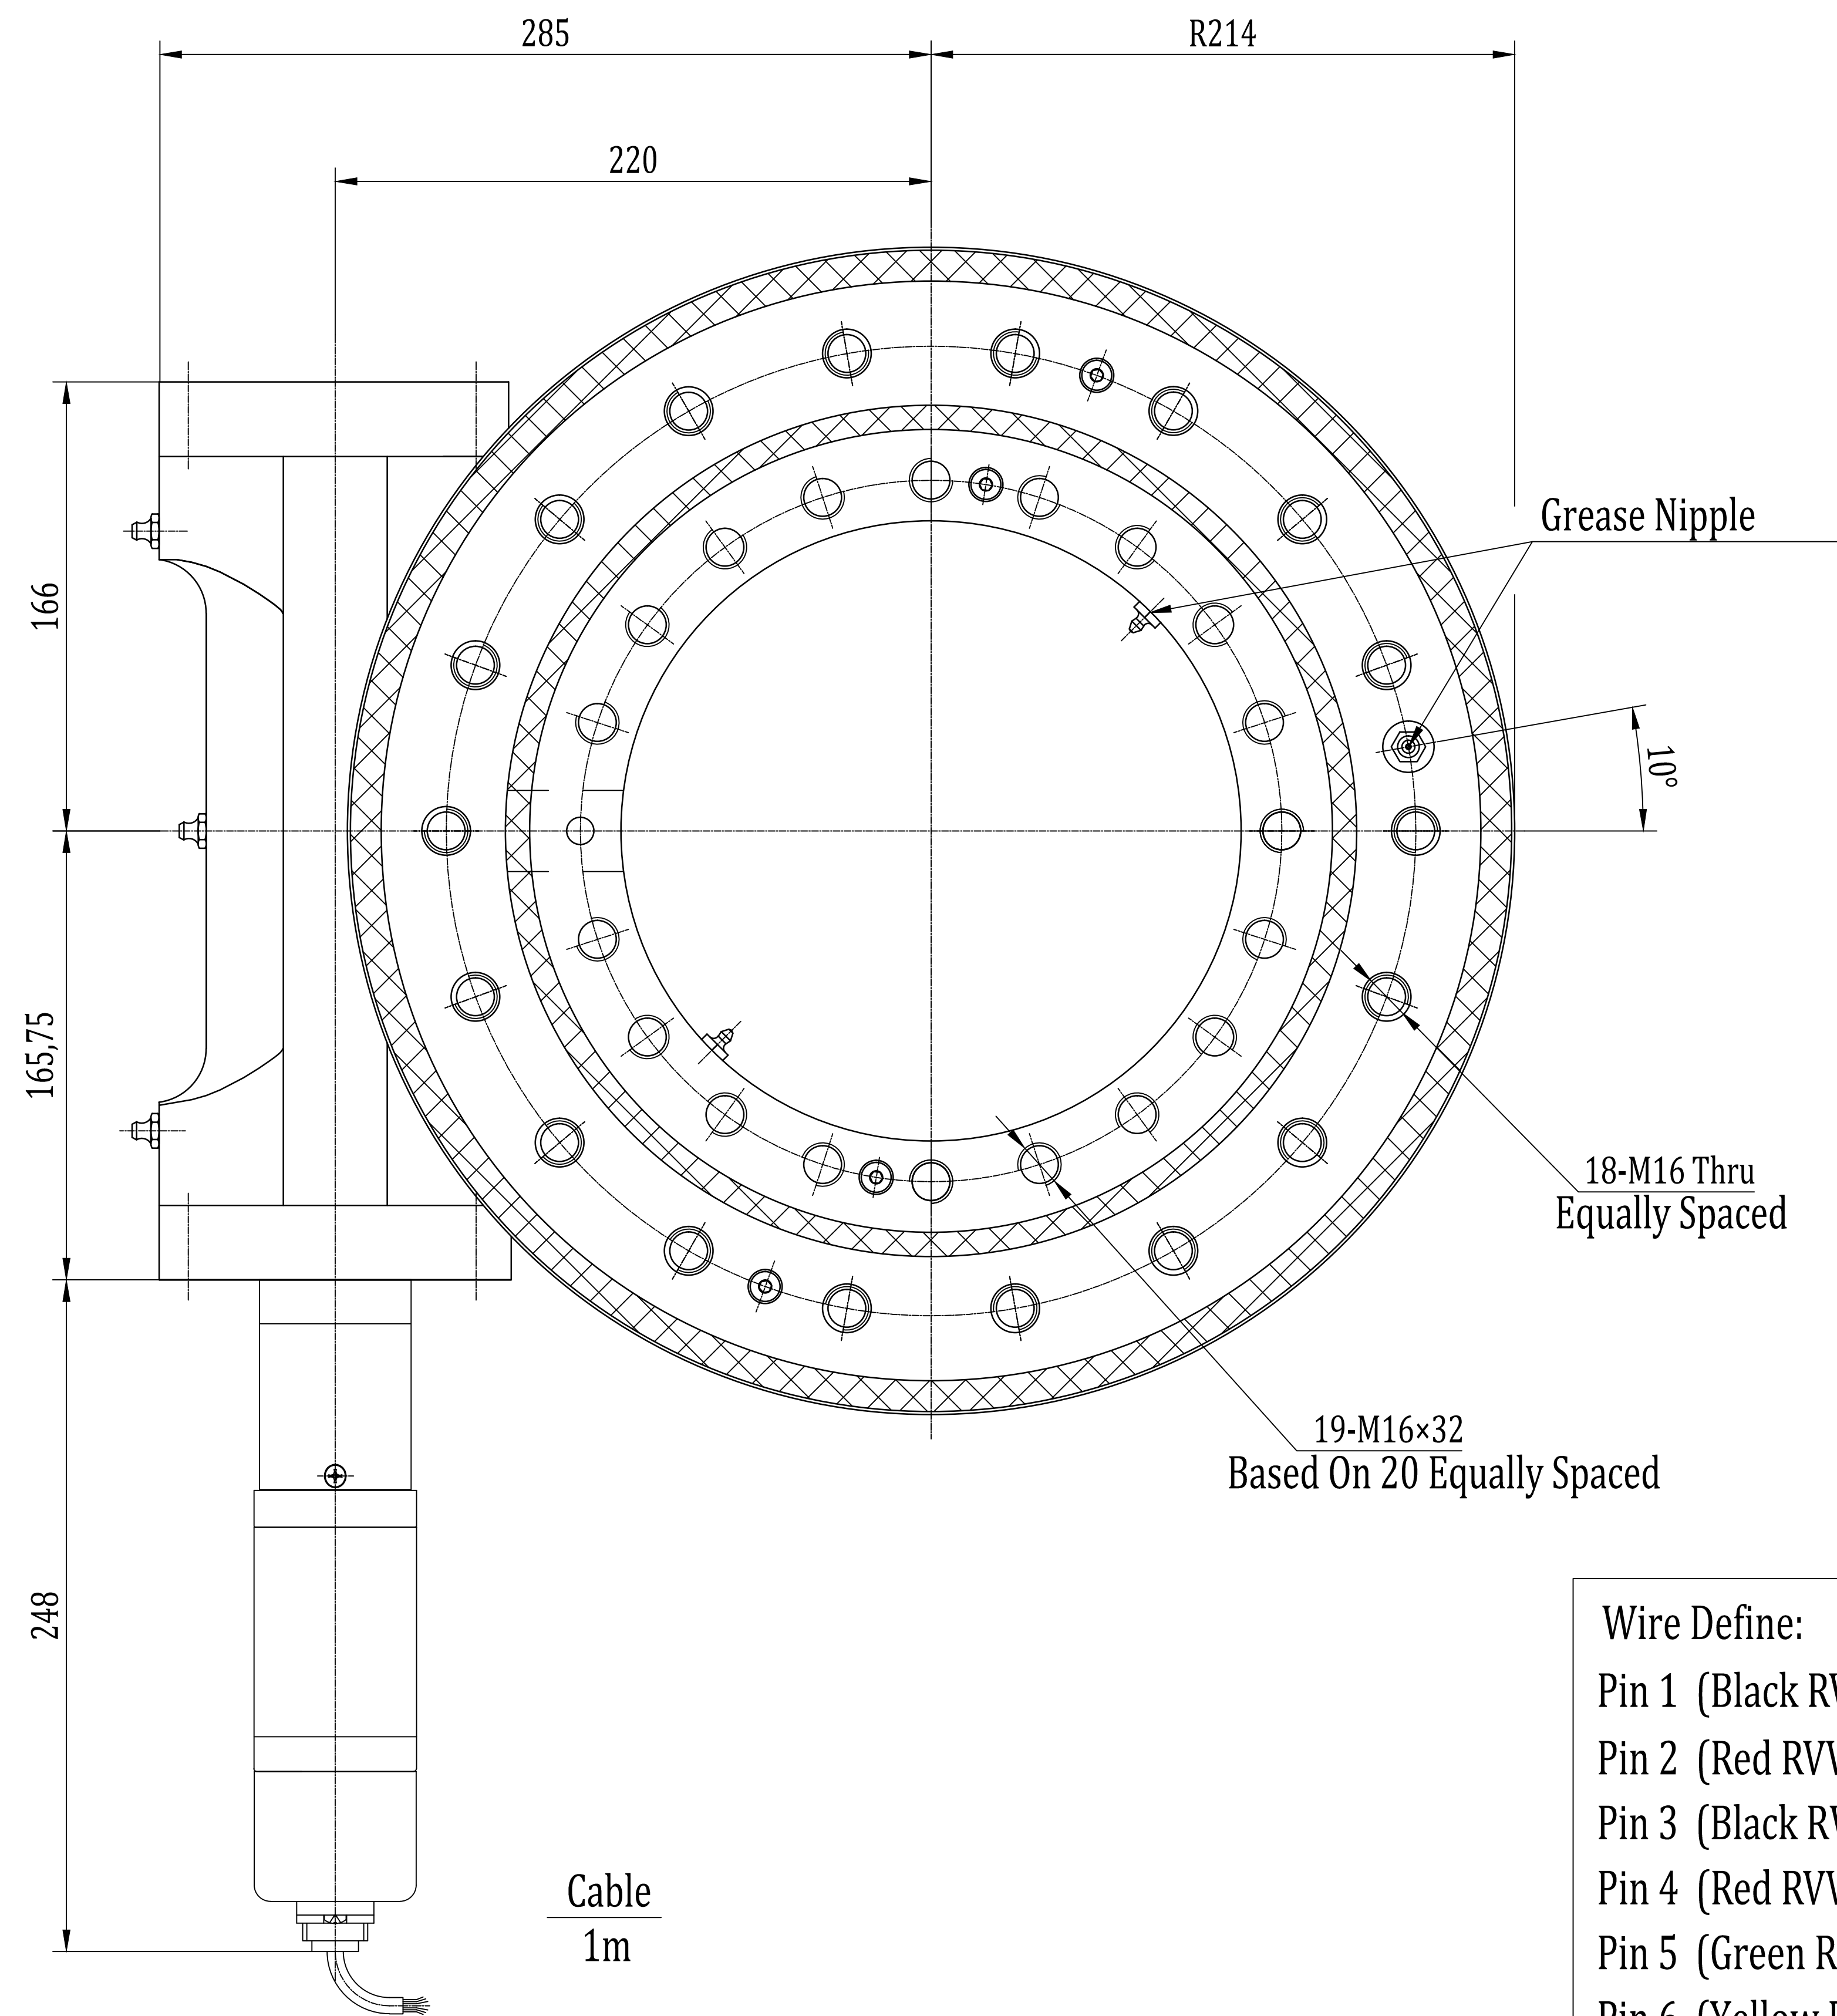
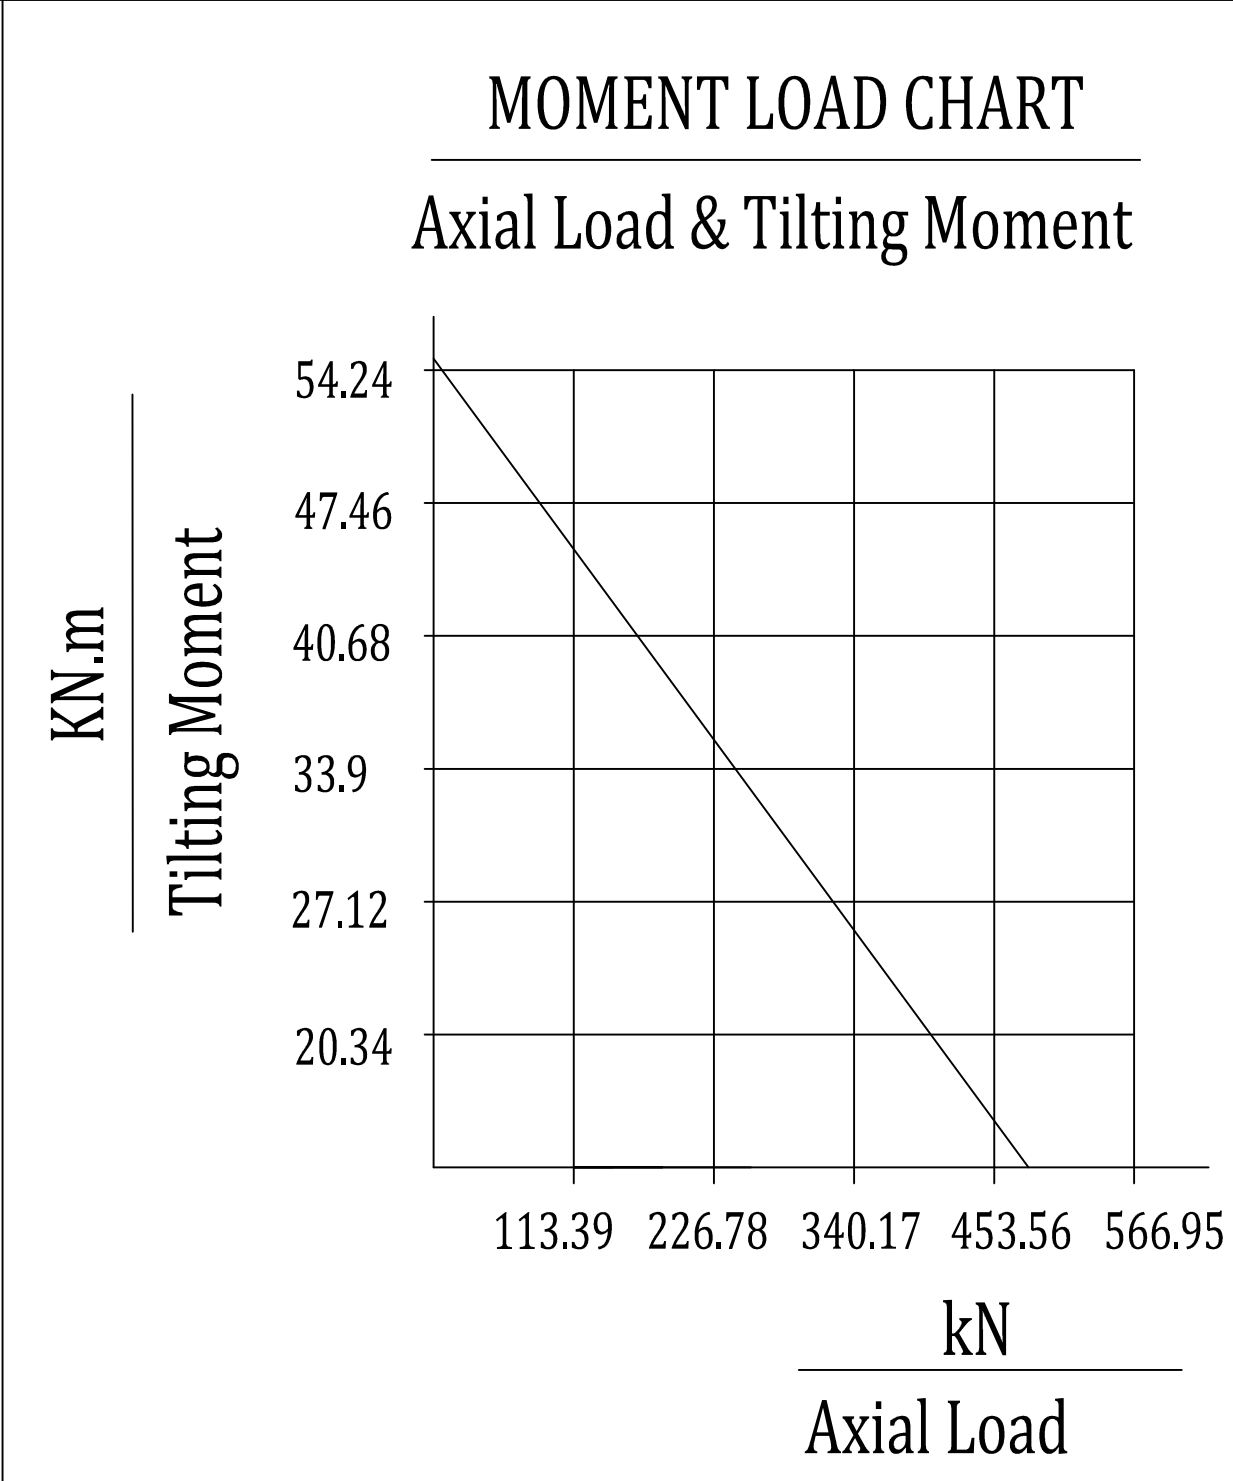
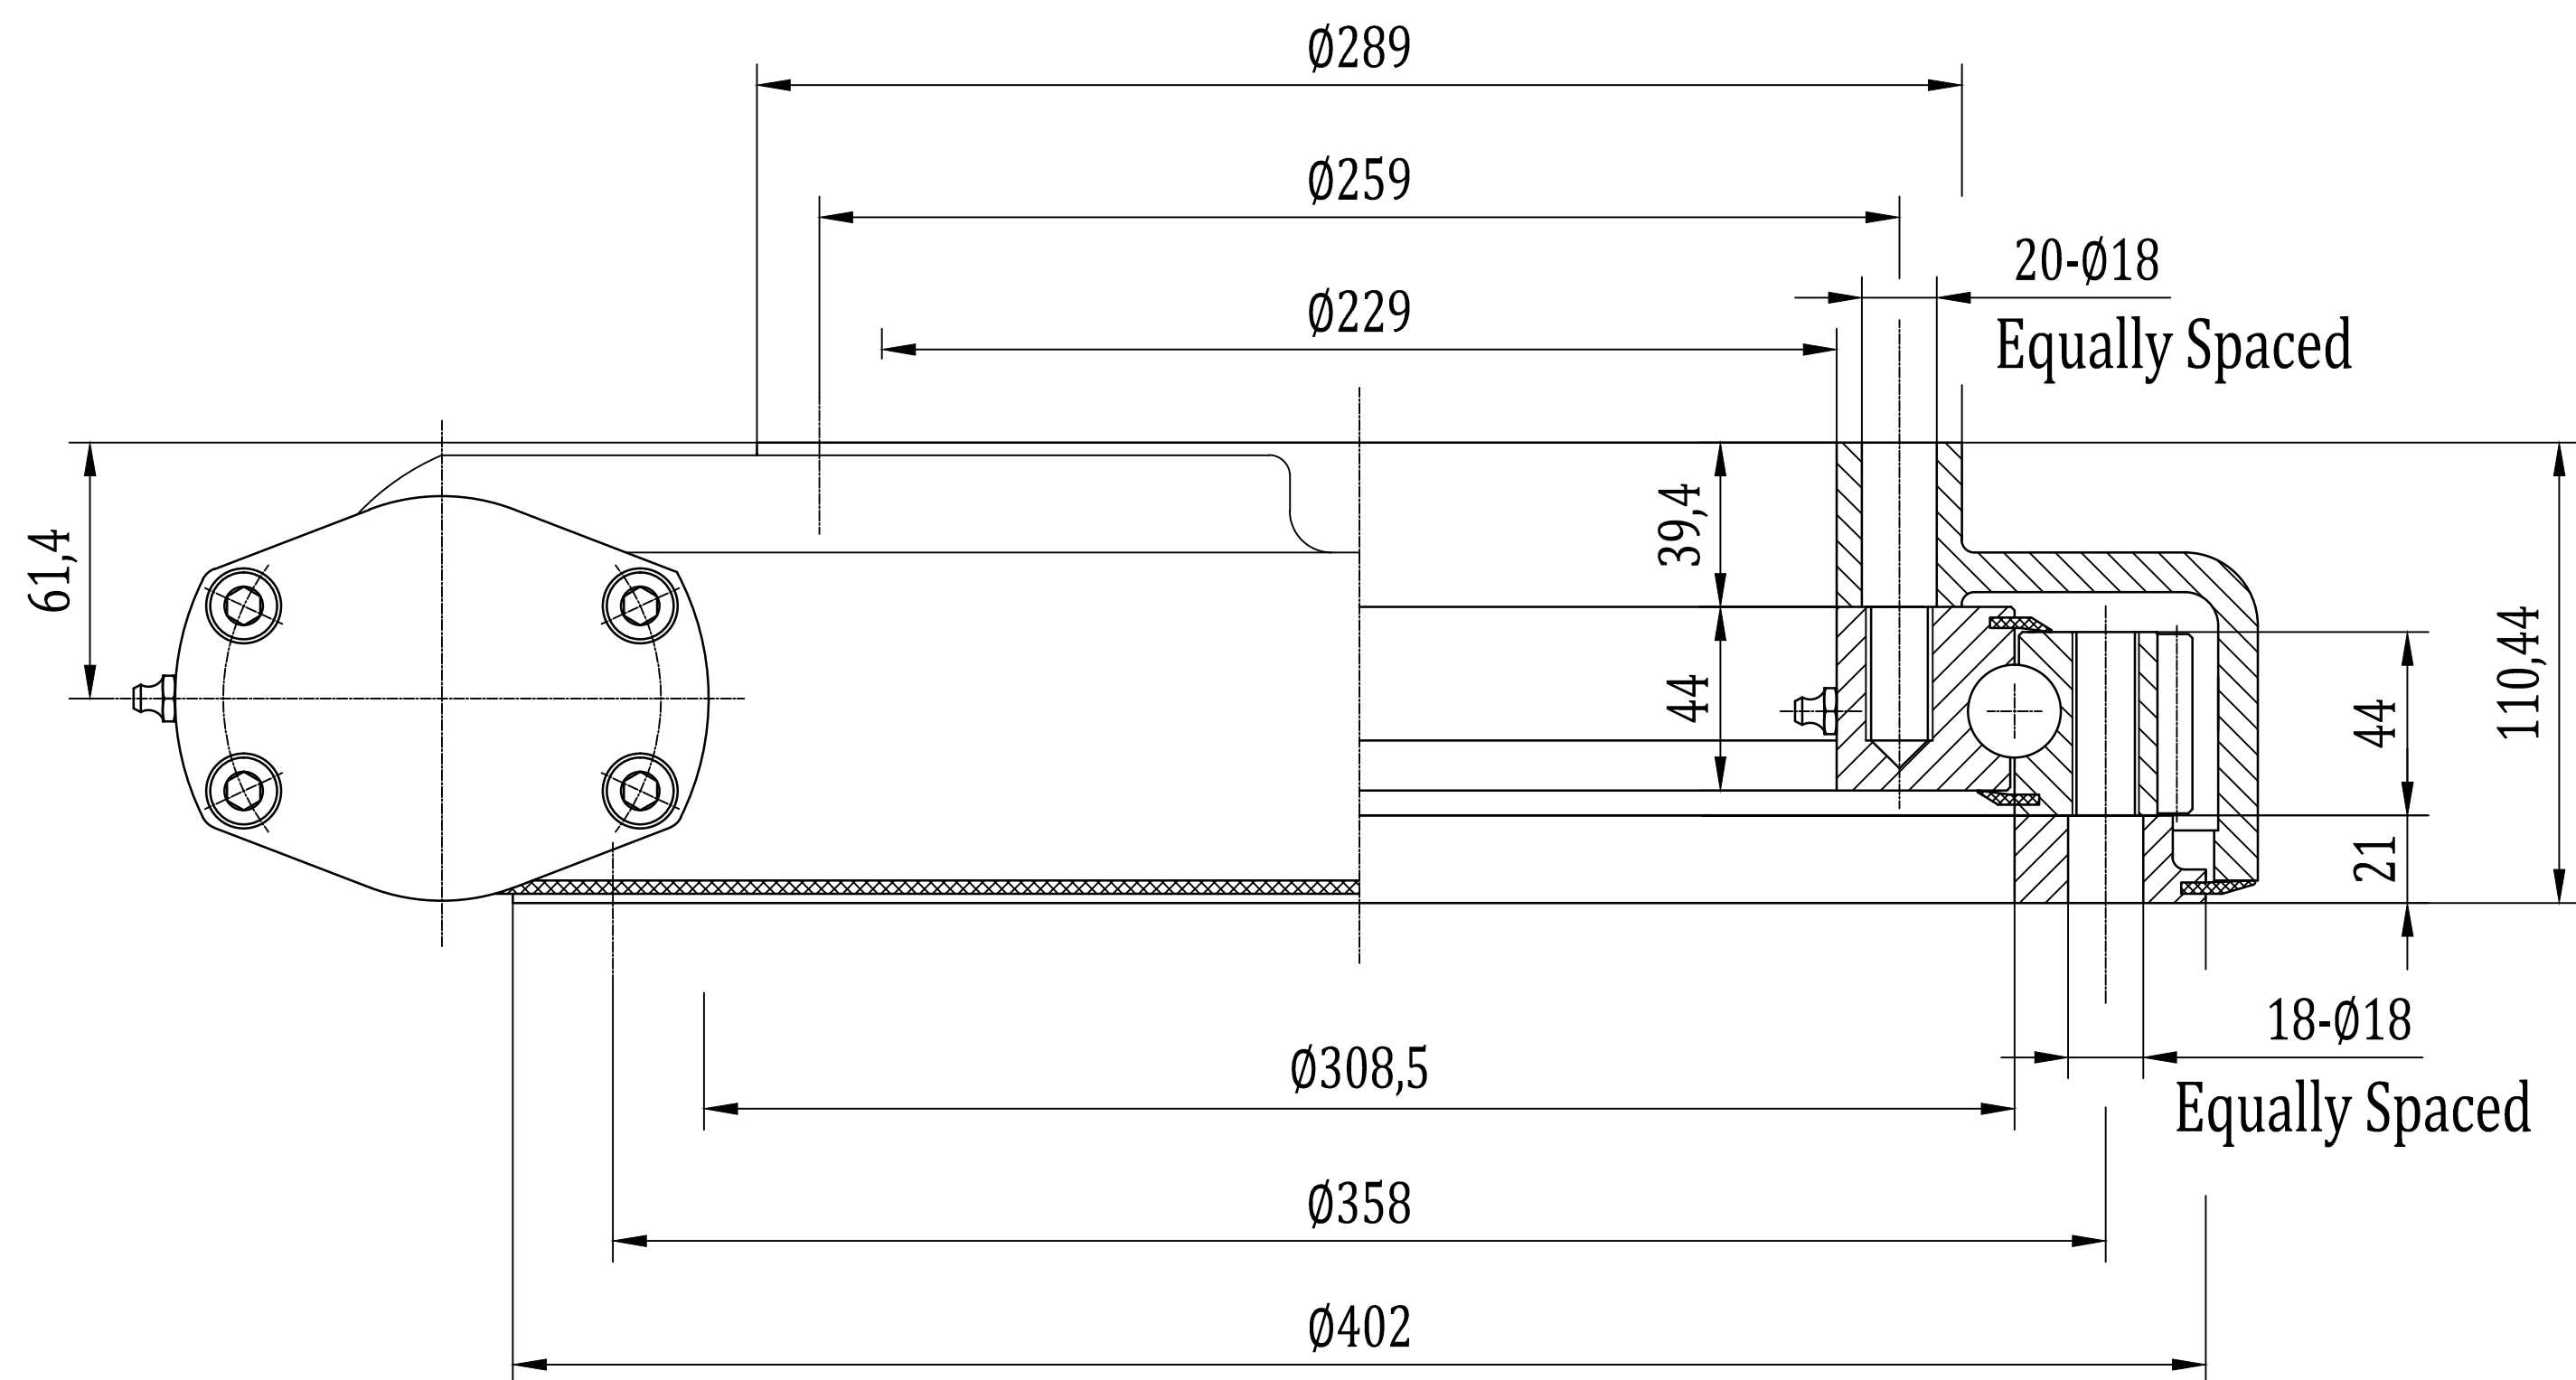


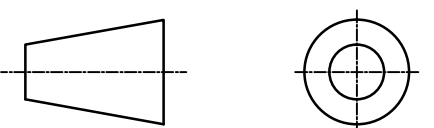

- Wire Define:
- Pin 1 (Black RVV0.75) motor -
 - Pin 2 (Red RVV0.75) motor +
 - Pin 3 (Black RVV0.2) hall -
 - Pin 4 (Red RVV0.2) hall +
 - Pin 5 (Green RVV0.2) hall A
 - Pin 6 (Yellow RVV0.2) hall B
 - Pin E (Yellow Green) RVV0.75 Ground



Slewing Drive Performance Parameters		
Rated Output Speed		0,038 rpm
Output Torque		3120 N.m
Tilting Moment		54,3kN.m
Holding Torque		43 kN.m
Static Axial Rating		475 kN
Static Radial Rating		190 kN
Gear Ratio		78 : 1
Efficiency		40 %
Precision		≤ 0,17°
24VDC Planetary Reducer Motor Performance Data(24H/30/100)		
Rated Voltage		24 VDC
Rated Current		< 3 A
Gear Ratio		236:1
Noises		≤60 dB
IP Class		IP 55
Temperature		-40 ~ +60°C
MAGNETIC PULSE GENERATOR DATA		
Output type	-	voltage output
pull-up resistor	-	yes
Output signal	-	2 square wave signals
Phase quadrature	-	90 °
Impulses per revolution	ppr	2,channels A and B
Operating voltage	VDC	DC5-24
Operating current	mA	max. 12
Deviation of pulse width	-	max. 15 °
Deviation of phase shift	-	max. 15 °
Output voltage(low level)	VDC	max. 0.4 (20mA)
SIGNAL RISE TIME	ns	85
SIGNAL DECAY TIME	ns	60
Operation temperature	°C	-40 - +85
signal A signal B high low high low 0° 90° 180° 270° 360°		

REV	DATE	REVISER	REVISER			
DESIGNED BY	2019/8/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2019/8/1	Rui Wang				
APPROVED BY	2019/8/1	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
			64 kg	1 : 3		
			SIZE	A3		
SYMBOLE ISO			SHEET	1 / 1	SC12-78B-RC-24H30100	REV A